



Installation Setup Guide

Step by Step instructions to successfully install your OSN HD Box


1. Connect your OSN HD box to the TV with the supplied HDMI cable.
2. Connect the power supply cable and plug into the electrical socket.
3. Place the batteries in the decoder remote control provided.
4. Turn the decoder ON by switching the ON button located at the back of the decoder.





Installation Setup Guide

Wait for the decoder to initialize and follow the on-screen instructions.

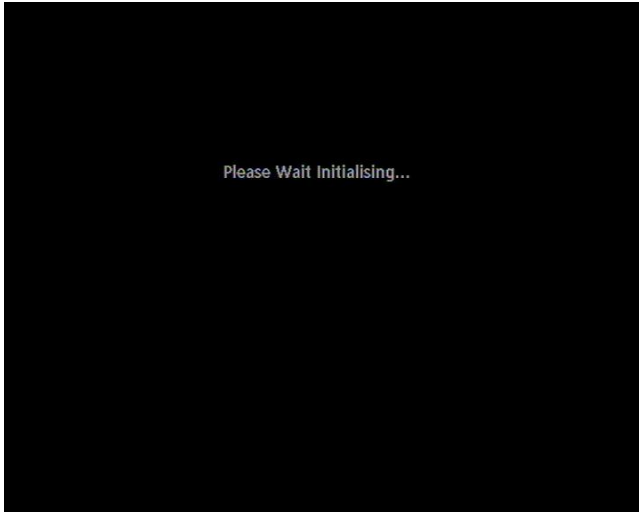

Booting Screen


First Time Installation Setup



Menu Language selection

Select your language, and then press the “OK” button on the remote control.

[OSN](#)

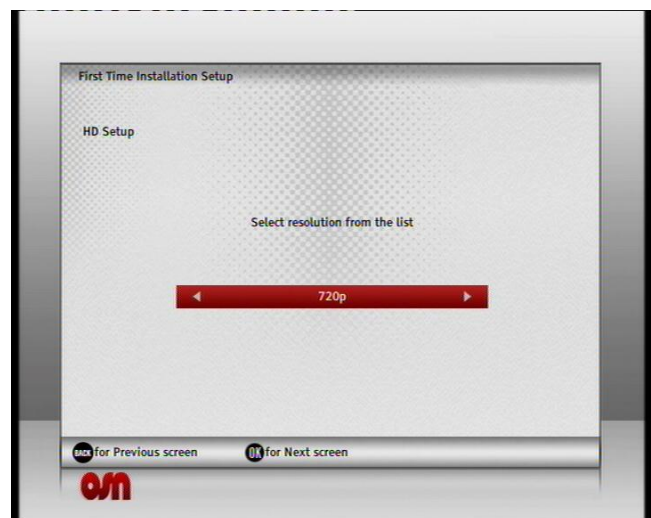


HD Resolution Selection


Select your HD resolution based on TV specs (1080i or 720p). Press the “OK” button on the remote control.




Installation Setup Guide

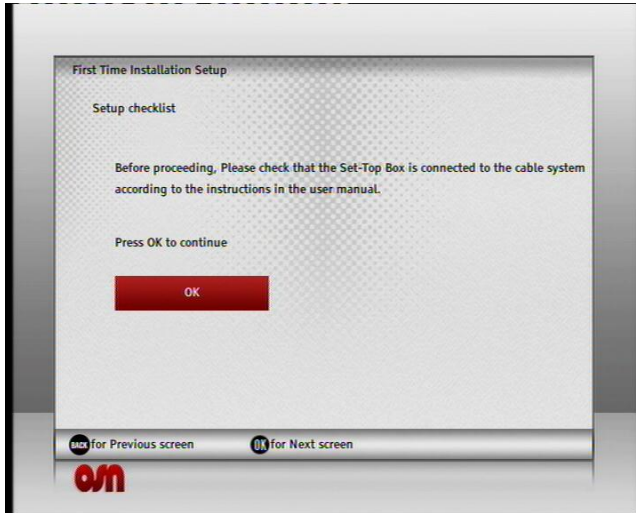


Verify that your OSN HD Box has a Nilesat feed connected then press “OK”

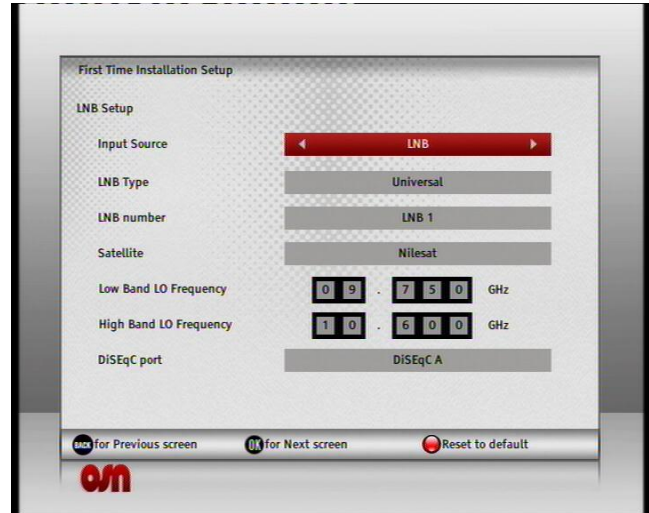

Press “OK”
If you have multiple satellite dishes, you may need to modify “DiSEqC port” to either A, B, C or D

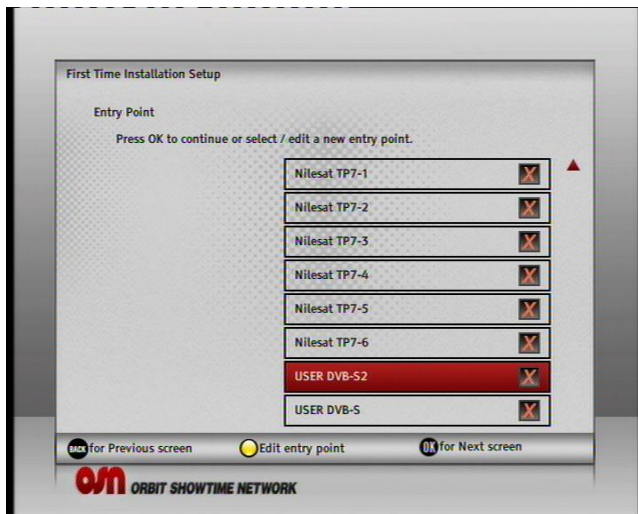

Scroll down to reach 2nd last entry point “User DVB-S2) then press the “Yellow” button

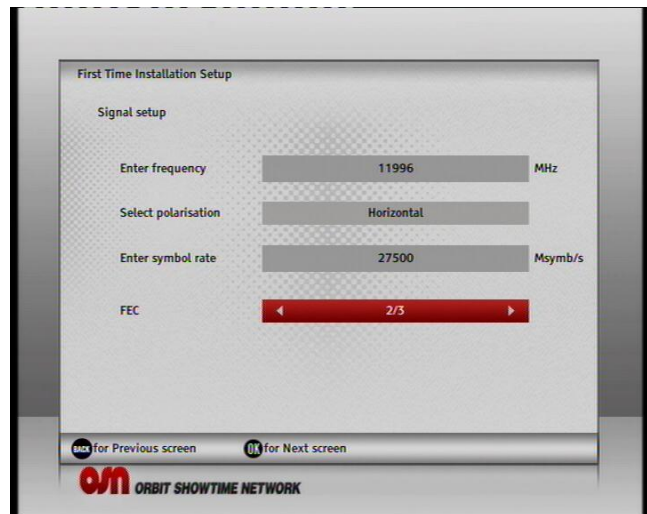


Enter the new parameters 11996, Horizontal, 27500, 2/3


Press the “OK” button to continue.



Installation Setup Guide

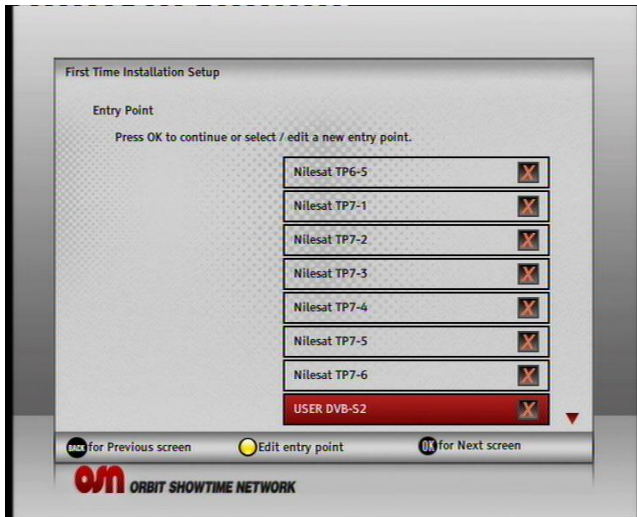


Press "OK" to check the signal level

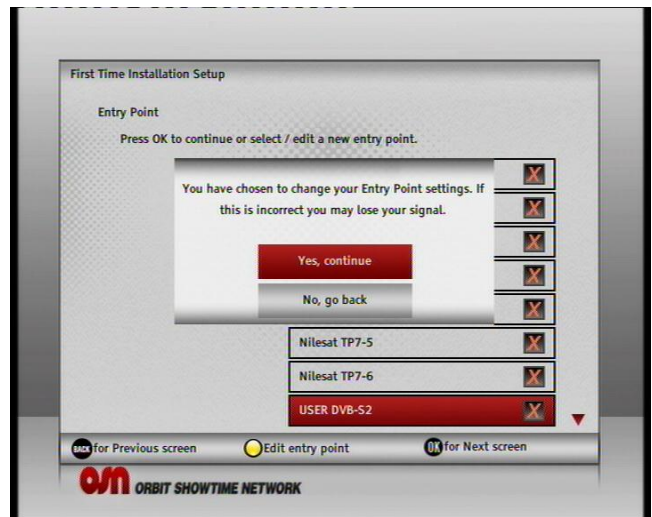

Select "Yes, continue"

Press the "OK" button to continue.

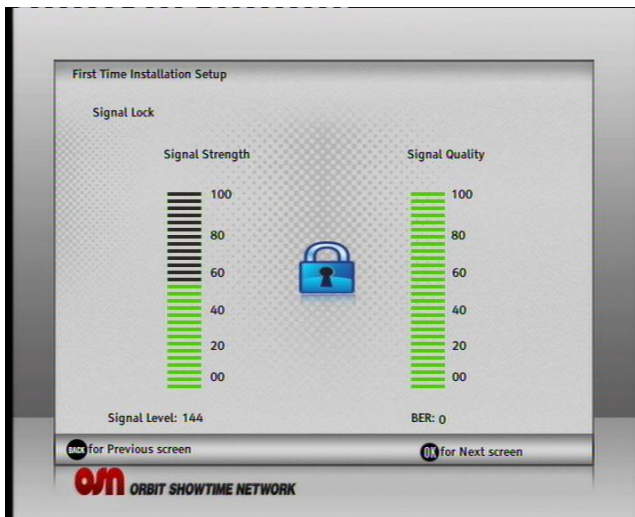

Signal Level Check

"Ok for Next screen" message will appear if the transponder has a valid Signal Level.

Press the "OK" button to continue.



The signal has been locked and the box is waiting for activation.

You are now ready to activate your box; visit: www.osn.com/activate